

- 1. Bañeras
- 2. Rectangulares
- 3. Mitta
- 4. 62402



Rectangular non-hydro 170x75

COLORES / ACABADOS

01
Blanco

ARTÍCULOS

Ref.	€/u	Producto/Conjunto	Medidas
62402	216,0 €	Bañera sin bastidor y sin desagüe.	170 x 75 cm
Opciones			
41561	46,1 €	Conjunto Bastidor con pies regulables para bañera autoportante Mitta de 75 cm.	
67428	171,4 €	Faldón frontal de 170 x 50 cm.	170 cm
67431	121,4 €	Faldón lateral de 75 x 50 cm.	75 cm
Accesorios			
41411		Reposacabezas poliuretano gris claro.	

INFORMACIÓN DE PRODUCTO

Características
Mitta without chassis and without waste. / 22 kg. / 10 units pallet.

Información de utilidad
Gala baths may be purchased with or without skirting panel. The location of the hydromassage system facilitates the installation of the enclosure. The chassis is free-standing, enabling its installation with the least possible disruption. The disinfectant for hydromassage baths with automatic disinfection is available at Gala.

Garantía
Gala products are guaranteed against any manufacturing defects, from the date of purchase of the product, only if the installation has been carried out in accordance with Gala’s installation instructions and, applying the current legislation on electrical and sanitary appliances, by authorised staff. The guarantee period for acrylic products is of 2 years.

Instalación
Please check our product installation manuals.

Certificaciones

High quality is a constant at Gala in order to guarantee the technical and aesthetic features as well as the performance of our products. Please check our product quality certificates.


Mantenimiento

Cleaning of the bath should be carried out using a soft sponge, soap and water. After cleaning, the bath should be dried so as to prevent limescale forming. No abrasive products, solvents or objects that could damage the bath surface should be used. Should the bath surface be scratched accidentally, it should be enough just to go over the surface with a solvent-free polish. If necessary, the scratch can first be wet-sanded with 800 G wet-and-dry sandpaper, then wet-sanded with 1200 G paper, before finally applying the polish.

AMBIENTE



DIBUJOS TÉCNICOS

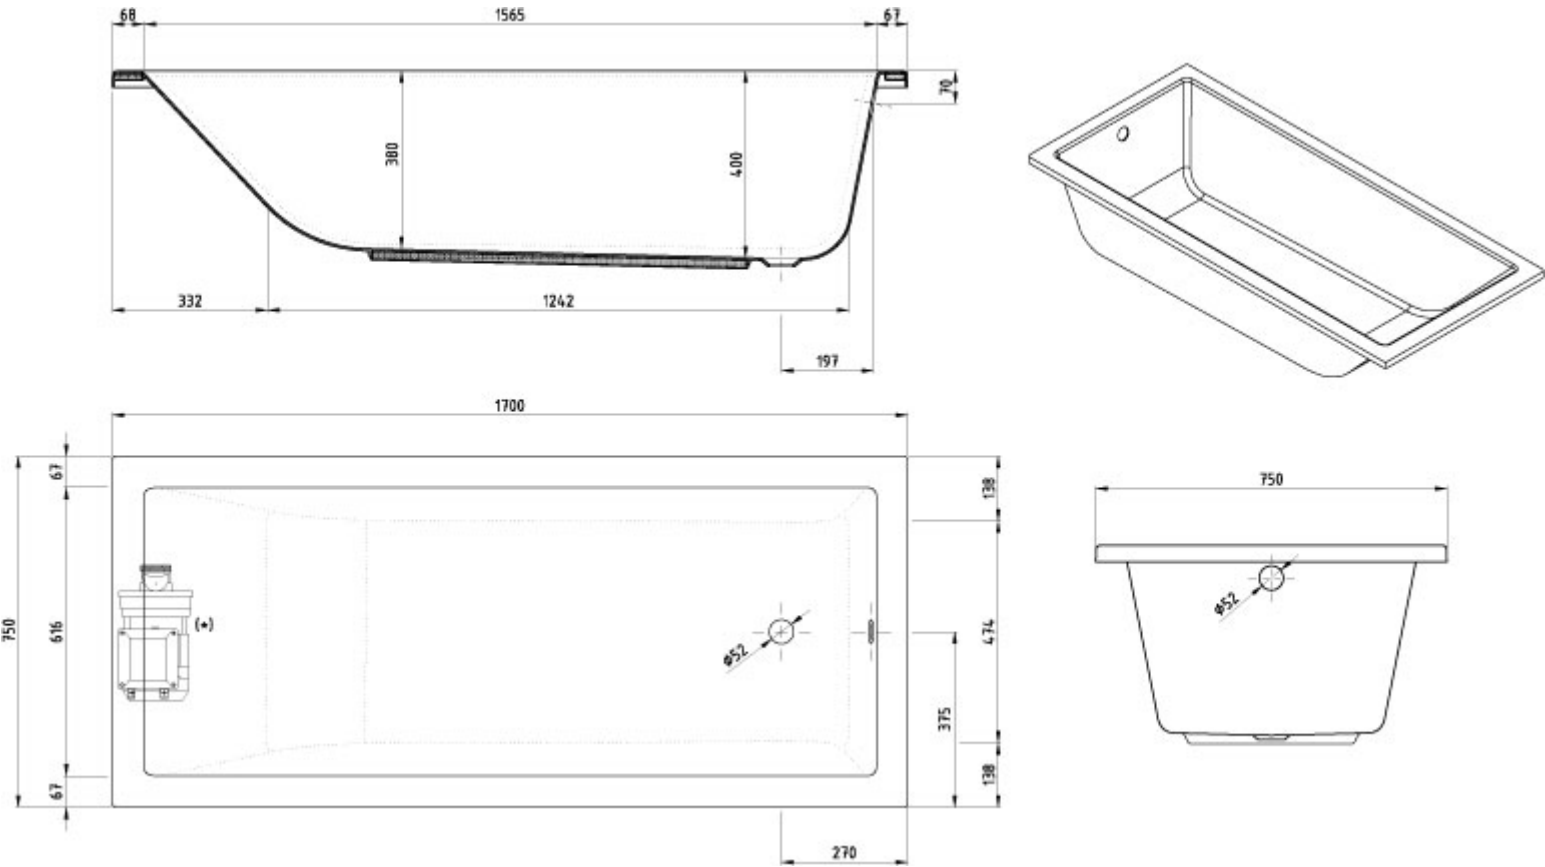

DESCARGAS

2D

-  185.42 KB  Rectangular non-hydro 170x75 - Técnico (.AI)
-  578.12 KB  Rectangular non-hydro 170x75 - Técnico (.DWG)
-  5.23 MB  Rectangular non-hydro 170x75 - Técnico (.DXF)
-  200.97 KB  Rectangular non-hydro 170x75 - Técnico (.PDF)

3D

-  293.08 KB  Rectangular non-hydro 170x75 - 3D (.DWG)



ArchiCAD



Revit

