

INSTRUÇÃO DE MONTAGEM

ASSEMBLY INSTRUCTIONS

Aviso Importante:

A SANINDUSA declina qualquer responsabilidade em eventuais danos provocados por montagem não conforme com as respectivas instruções, bem como devido a alterações que englobem a não utilização de peças que fazem parte integrante do(s) conjunto(s).

Warning:


SANINDUSA declines any responsibility for any damage caused by not having followed the instructions for assembly or by the use of strange parts to the set.

Características técnicas:


- Cartucho fechado discos cerâmicos - d35
 - Pressão caudal - Min. 0.5 bar / Max. 5bar
 - Pressão recomendada de trabalho - 3 bar
 - Resistência à pressão estática - Max. 10 bar
- 1 - Para pressões estáticas superiores a 5 bar aconselha-se a instalação de um redutor de pressão.
2 - Evitar grandes diferenças entre pressões de água quente e fria.

Technical Data:


- Ceramic closed cartridge – d35
 - Water Service Pressure:
 - Recommended: 3 bars
 - Minimum: 0.5 bar
 - Maximum: 5 bar
 - Static pressure resistance - Max. 10 bar
- 1 - With static pressure of more than 5 bar, use a pressure reducing valve for reduction.
2 - To ensure the best performance of the mixer, the service pressures for hot and cold water, have to be kept as balanced as possible.

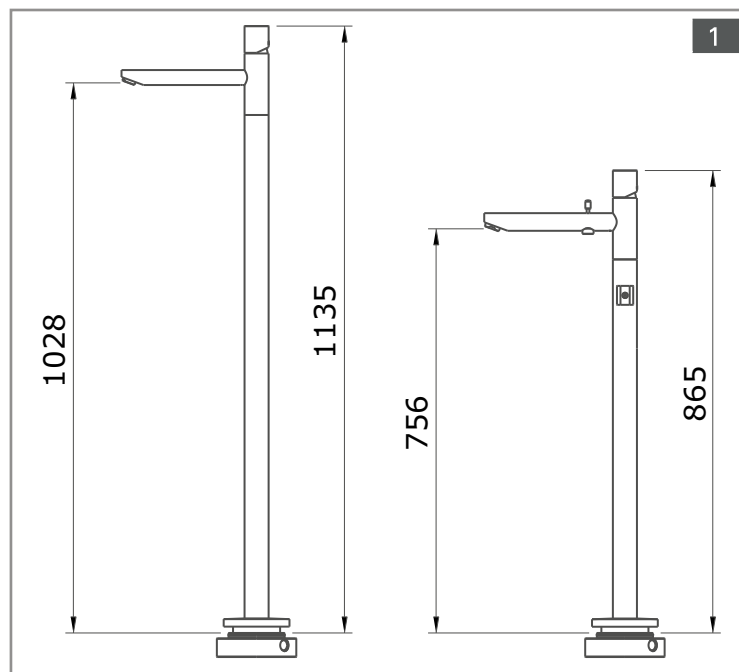


2

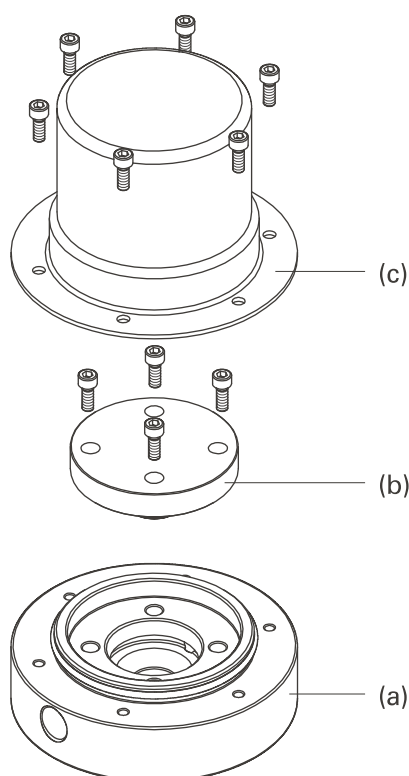

3






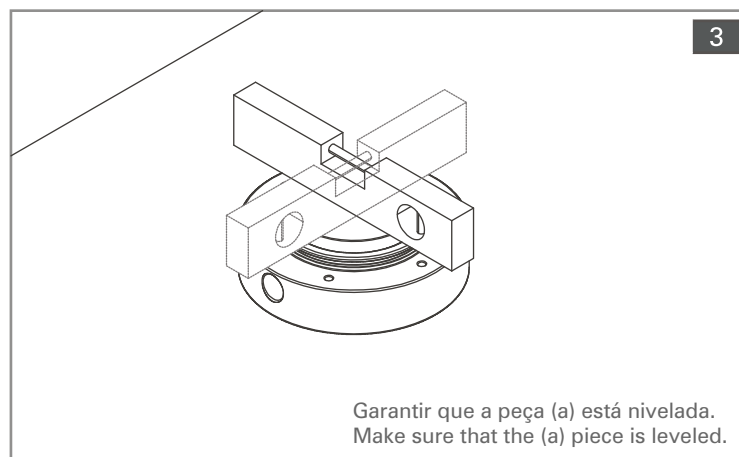


4

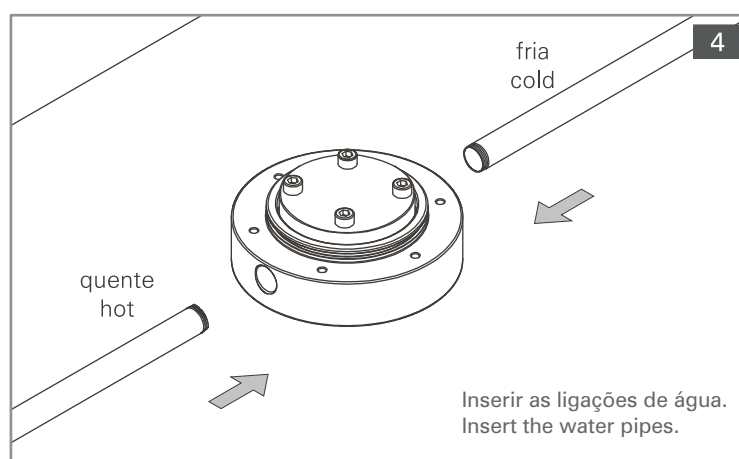

INSTRUÇÃO DE MONTAGEM

ASSEMBLY INSTRUCTIONS

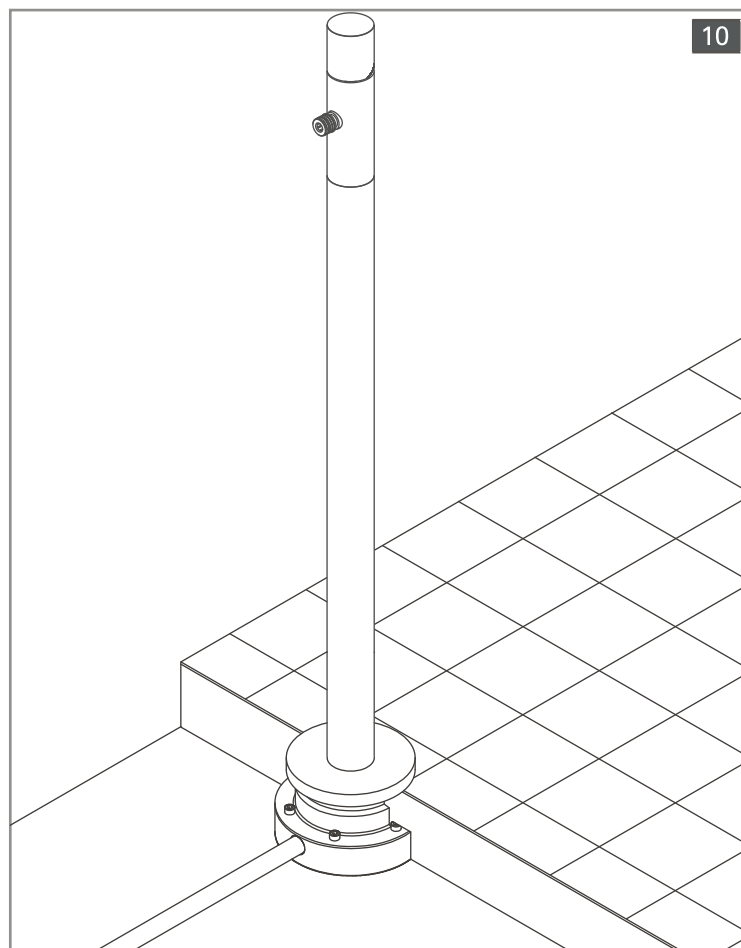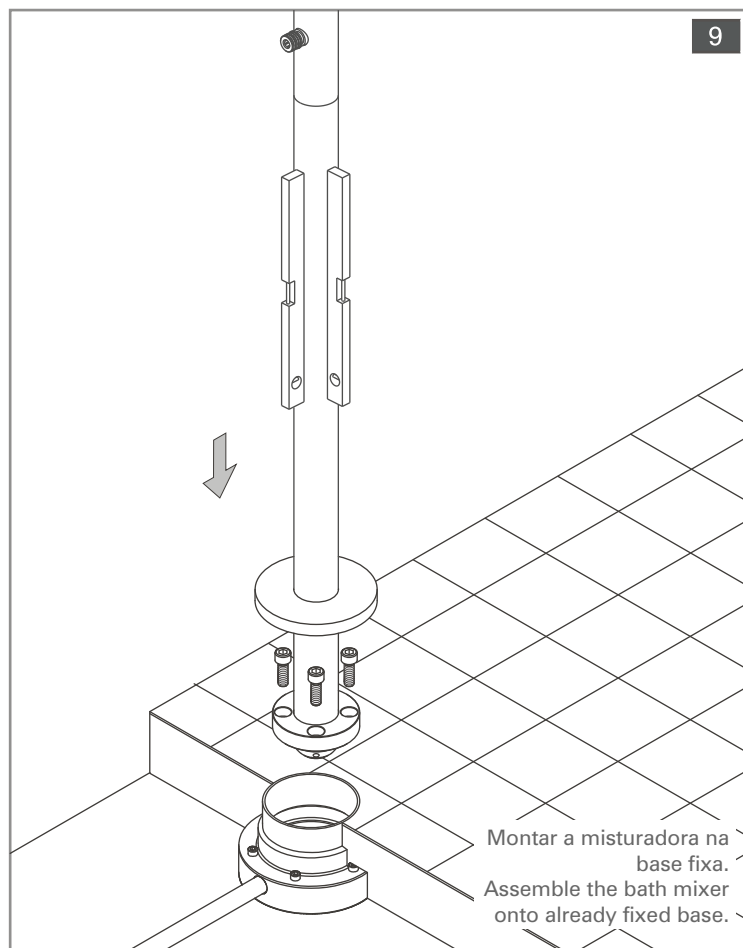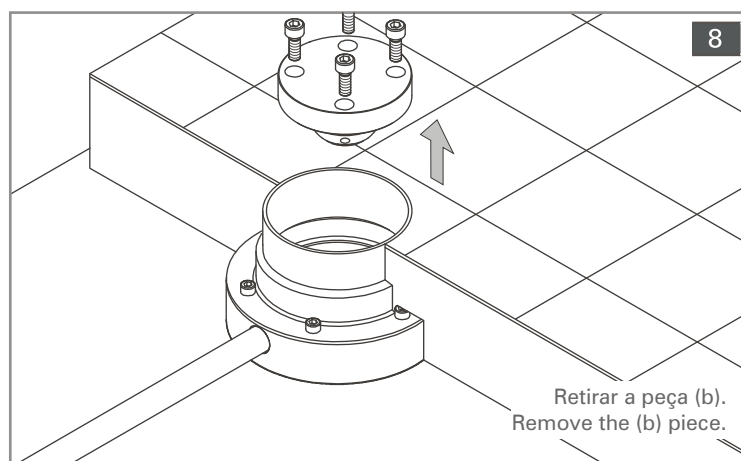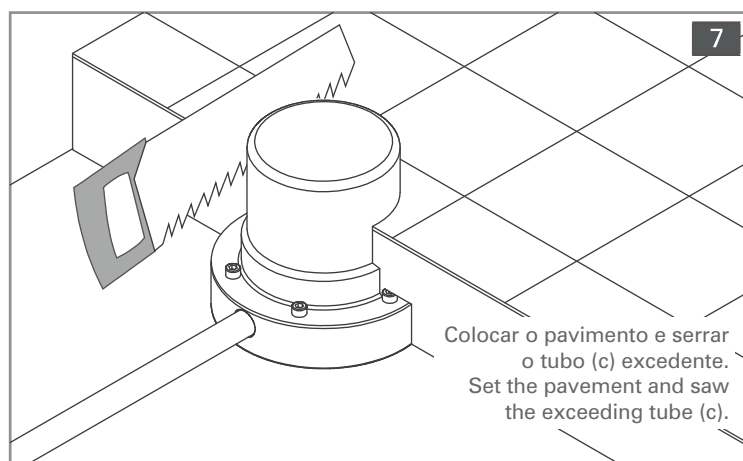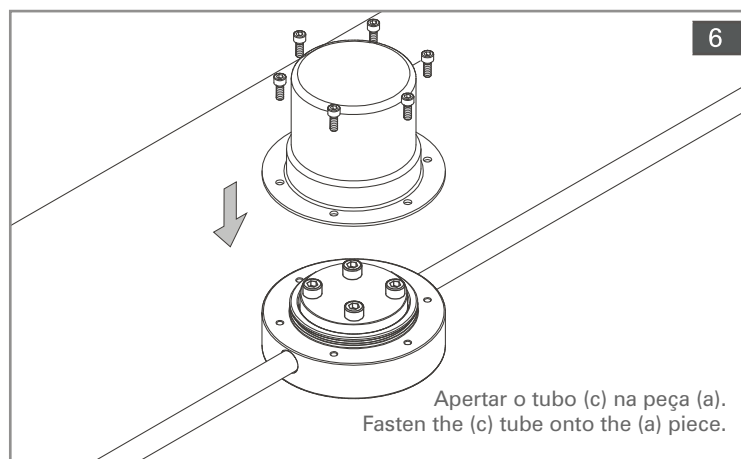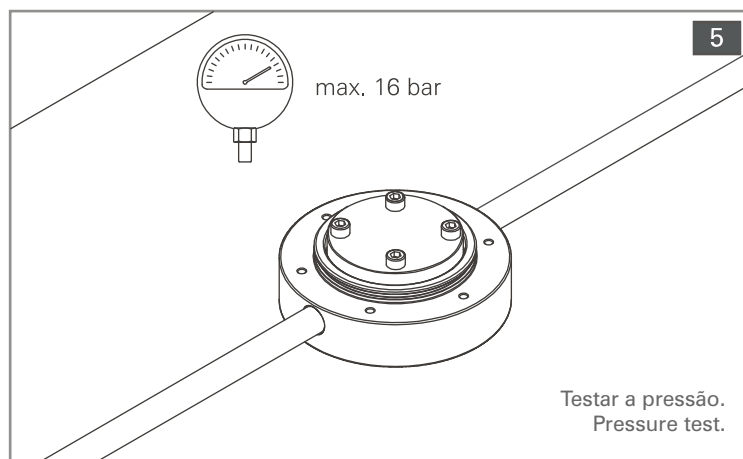

INSTRUÇÃO DE MONTAGEM

ASSEMBLY INSTRUCTIONS

